


Life

Living, with nature



The beauty of feeling at home





It's my home, it's life

They're my emotions, my discoveries, everything I care about.

Polar

Hay

Smooth

Bourbon

Smoke

4

Colors that evoke and create an harmonious and free style

In the shades inspired by wood,
I rediscover a warm and welcoming sensation every day.

Glazed porcelain stoneware

Indoor
NATURAL

SIZES

8"x36" _20x90.5 cm

Outdoor
ANTI-SLIP
special order only

SIZES

8"x36" _20x90.5 cm



5

Interior design has returned to the essence by creating embracing, warm and comfortable environments

Vivid wood, with natural tones and prominent grain, is the source of inspiration for a colored-body glazed stoneware tile with excellent technical performances which guarantee enduring beauty. The surface is full of details, pleasing to the eye and to the touch. It offers a natural feeling, which must be experienced day by day.








**A timeless décor,
perfect for giving new creative
energy to any environment,
offering a flawless essential mood**







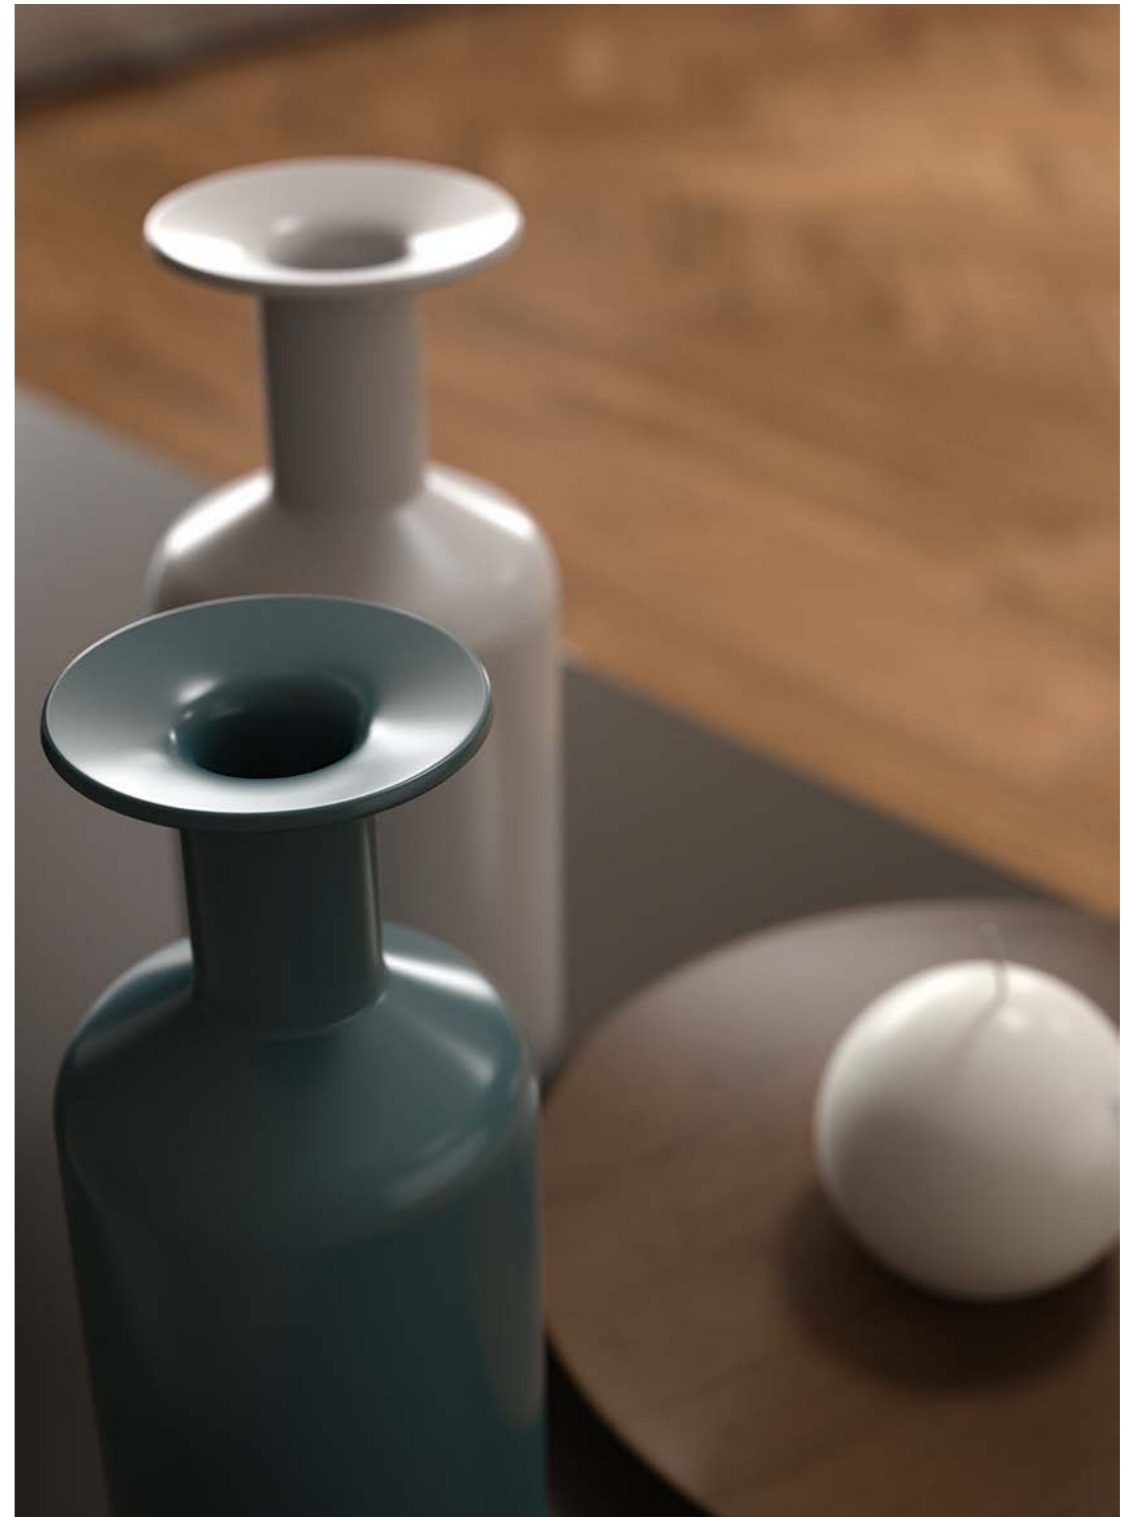

Smooth Natural 8"x36" - 20x90.5 cm















**The natural vocation of the surface,
so detailed and intense,
is combined with the performance
of porcelain stoneware,
to offer perfection in any space**





Life

COLOURED-BODY GLAZED STONEWARE

INTENDED USE: NATURAL    ANTI-SLIP 

POLAR



HAY



SMOOTH



BOURBON



SMOKE



DECOS



B
HERRINGBONE MODULUS A-B POLAR
10"x24" - 24.4x60 cm
NATURAL \pm 9 mm



B
HERRINGBONE MODULUS A-B HAY
10"x24" - 24.4x60 cm
NATURAL \pm 9 mm



B
HERRINGBONE MODULUS A-B SMOOTH
10"x24" - 24.4x60 cm
NATURAL \pm 9 mm



B
HERRINGBONE MODULUS A-B BOURBON
10"x24" - 24.4x60 cm
NATURAL \pm 9 mm



B
HERRINGBONE MODULUS A-B SMOKE
10"x24" - 24.4x60 cm
NATURAL \pm 9 mm

\pm 9 mm

8"x36" - 20x90.5 cm

NATURAL
ANTI-SLIP

Anti-Slip surface special order only

Life

COLOURED-BODY GLAZED STONEWARE



TRIM PIECES



COVE BASE
6"x12" - 15x30 cm
NATURAL
 \pm 9 mm
Special order only

TECHNICAL FEATURES

COLOURED-BODY GLAZED STONEWARE according to ANSI A137.1 (Glazed Porcelain Tiles - P1 Class)

TECHNICAL FEATURES	TEST METHOD	REQUIRED VALUES	LIFE AVERAGE VALUES
 WATER ABSORPTION	ASTM C373	\leq 0,5%	CONFORMS
 BREAKING STRENGTH	ASTM C648	\geq 250 lbf	350 lbf 9 mm
 SURFACE ABRASION RESISTANCE	ASTM C1027	As indicated by manufacturer	PEI 4: POLAR - HAY PEI 3: SMOOTH - BOURBON - SMOKE
 LINEAR THERMAL EXPANSION	ASTM C372	No provision	$\alpha \leq 4,4 \times 10^{-6} \text{ }^{\circ}\text{F}^{-1}$ $\alpha \leq 8 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$
 STAIN RESISTANCE	ASTM C1378	As indicated by manufacturer	A RESISTANT
 CHEMICAL RESISTANCE ^(*)	ASTM C650	As indicated by manufacturer	A RESISTANT
 FROST RESISTANCE	ASTM C1026	As indicated by manufacturer	RESISTANT
 BOND STRENGTH	ASTM C482	\geq 50 PSI	CONFORMS
 SLIP RESISTANCE	DIN EN 16165 - Annex B	-	R11 Anti-Slip***
	DIN EN 16165 - Annex A ANSI A326.3	-	C (A+B+C) Anti-Slip*** ID - DCOF \geq 0.42 (dry) Natural IW - DCOF \geq 0.42 (wet) Natural IW+ Natural*** - Anti-Slip**** EW Anti-Slip****
 SHADE VARIATION	ANSI A137.1	As indicated by manufacturer	V2 Slight variation
 FLAME SPREAD	ASTM E84	-	Class A
 THERMAL CONDUCTIVITY	EN 12524	-	$\lambda = 1,3 \text{ W/m }^{\circ}\text{K} / 0,7 \text{ BTU/ft h }^{\circ}\text{F}$
 RECOMMENDED MINIMUM JOINT ^(**)	NOT RECT (INDOOR)	-	3/16" - 4.7 mm approx
	OUTDOOR	-	3/16" - 4.7 mm approx
 THICKNESS	SIZES		9 mm
	8"x36" - 20x90.5 cm	-	

(*) Excluding hydrofluoric acid and its derivatives.

(**) Grout Joint Recommendations. Per TCNA Handbook, the minimum required joint width for ceramic tile and natural stone is 1/16". Setting ceramic or stone without a grout joint of a least 1/16", often referred to as a butt joint, does not provide sufficient accommodation for dynamic building movement, differential thermal expansion, or allowable variation in fabrication or manufacturing.

(***) With the exception of areas characterized by a higher risk of slipping (such as public showers, indoor swimming pools, locker rooms and steam rooms) for which an Anti-Slip surface is recommended.

(****) Anti-Slip surface special order only.

PACKINGS AND WEIGHTS

SIZES	SF / CTN	LINEAR FT / CTN	PIECES / CTN	CTN / PALLET	SF / PALLET	LBS / CTN	LBS / PALLET
8"x36" Natural / Anti-Slip	13.94	-	7	48	669	53.37	2,561.76
HERRINGBONE MODULUS A-B 10"x24" Natural	5.54	-	6	35	193.9	27.6	966
COVE BASE 6"x12" Natural	3.87	-	8	108	417.96	16.5	1,782

Life

COLOURED-BODY GLAZED STONEWARE

INTENDED USE

KEY



RESIDENTIAL

Kitchens, bathrooms, living rooms and other residential environments.



LIGHT COMMERCIAL

Offices, offices open to the general public, waiting rooms, shops, public bathrooms, common apartment block areas, restaurant dining rooms, car showrooms, bars, cinemas, surgeries/clinics, hotel rooms and bathrooms.



INTENSIVE COMMERCIAL

Common areas of shopping centres, hotel foyers, canteens, fast food restaurants, dance clubs, hospitals, schools, museums, places of worship, airports, stations.



OUTDOOR

Mainly for external areas that require flooring with anti-slip characteristics.

CERTIFICATIONS



PANARIA CERAMICA is a member of the U.S. Green Building Council: this is an organisation that promotes buildings that are environmentally responsible, profitable and healthy places to live and work. LEED card LIFE series is available on request.



GREENGUARD CERTIFICATION
Panaria LIFE series is made in a production plan GOLD GREENGUARD certified.



Certified by



Certified by UL Environment



ENVIRONMENTAL PRODUCT DECLARATION
This Environmental Product Declaration is provided by Tile Council of North America (TCNA).

Product designed in Italy and made in USA

PANARIA AND THE ENVIRONMENT



100% REUSE OF UNFIRED TILES

Crude waste generated by the process is reintegrated in the production cycle with no costs for the environment. This contributes to the safeguard of natural resources.



LOW EMISSIONS IN THE ATMOSPHERE

Panaria production plant strictly complies to US Standards with a very small amount of gas emissions in the atmosphere.



100% REUSE/RECYCLING OF THE INDUSTRIAL WASTE - FIRED TILES

The waste-fired tiles are fully reused in the production cycle. In addition, at the end of life, the tiles Panaria can be recycled as materials for substrates for roads and buildings, thus reducing the use of gravel and natural aggregates commonly used in building.



SAFETY REQUIREMENTS: NO FIRE REACTION

All of Panaria's ceramic tile products are Class A building materials as described in ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials. This is due to the flame spread rating of (0) and smoke developed rating of (0) falling within the ranges of a Class A material. Other building codes refer to this as a Type I material in accordance with NFPA 255.



100% WATER RECYCLING

The water used in the production process is recycled. The water demand is strongly reduced by this mean.



PANARIA PACKING MATERIAL IS 100% RECYCLABLE

Carton boxes, plastic packaging materials, wooden pallets, straps, etc.



100% OF NON CERAMIC WASTE

Is differentiated and recycled in other production cycles.



METHANE CONSUMPTION IS HIGHLY REDUCED

By the use of up to date technologies and customized installations.



Follow us on



Group Marketing & Communications - Panariagroup
February 2023

Panaria
ceramica

Via Panaria Bassa, 22/a
41034 Finale Emilia (Modena) - Italy
Tel. +39 0535 95111 - Fax +39 0535 90503
info@panaria.it - panaria.it

PANARIAGROUP INDUSTRIE CERAMICHE S.p.A.
panariagroup.it