

ELEGANCE MADE EXCELLENT



# ELEGANCE MADE EXCELLENT

Tycoon combines sophisticated surfaces with precious mosaics, creating eye catching appeal due to its luxuriously rich details. This natural stone-based collection raises the value of interior design to new levels of style and opulence. Designed for those who always seek maximum refinement and differentiation to stand apart, and never settle in any stylistic choice.

# 4 COLORS



# 5 SIZES




# 4 MOSAICS



# POLAR

Sizes, mosaic and trim pieces



12”x12” Mosaic (2”x2” - 36 dot)  
1103061




3”x12” Bullnose - 1103065

- Thickness 10mm  
16”x32” - 1103032  
32”x32” - 1103020  
24”x48” - 1103219
- Thickness 8mm  
12”x24” - 1103045  
3”x12” - 1103057

# SMOKE

Sizes, mosaic and trim pieces



12”x12” Mosaic (2”x2” - 36 dot)  
1103059




3”x12” Bullnose - 1103063

- Thickness 10mm  
16”x32” - 1103030  
32”x32” - 1103018  
24”x48” - 1103217
- Thickness 8mm  
12”x24” - 1103043  
3”x12” - 1103055

# BUFF

Sizes, mosaic and trim pieces



12”x12” Mosaic (2”x2” - 36 dot)  
1103060




3”x12” Bullnose - 1103064

- Thickness 10mm  
16”x32” - 1103031  
32”x32” - 1103019  
24”x48” - 1103218
- Thickness 8mm  
12”x24” - 1103044  
3”x12” - 1103056

# STORM GREY

Sizes, mosaic and trim pieces



12”x12” Mosaic (2”x2” - 36 dot)  
1103058



3”x12” Bullnose - 1103062

- Thickness 10mm  
16”x32” - 1103029  
32”x32” - 1103017  
24”x48” - 1103216
- Thickness 8mm  
12”x24” - 1103042  
3”x12” - 1103054



# BEIGE MIX (POLAR - BUFF)

Mosaic pieces



12"x14.5"  
Arabesque Mosaic - 1103071



13.7"x14.5"  
Wave Mosaic - 1103067




12.5"x15"  
Leaf Mosaic - 1103069

# GREY MIX (SMOKE - STORM GREY)

Mosaic pieces



12"x14.5"  
Arabesque Mosaic - 1103070

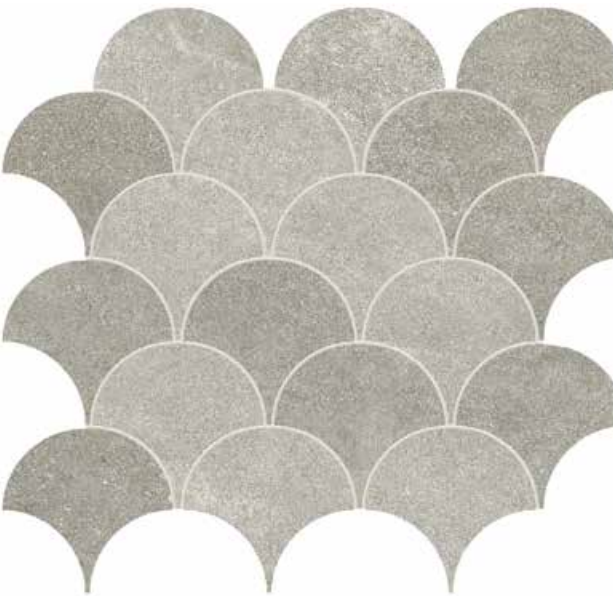

13.7"x14.5"  
Wave Mosaic - 1103066



12.5"x15"  
Leaf Mosaic - 1103068



ELEGANCE  
MADE  
EXCELLENT

Wall: 24"x48" Smoke  
Floor: 32"x32" Smoke





Wall: 12"x24" Storm Grey  
Floor: 24"x48" Storm Grey





Wall: 12"x12" Mosaic Smoke  
Floor: 16"x32" Smoke





Floor: 12"x24" Storm Grey  
Floor: 16"x32" Smoke





Wall: 12"x12" Mosaic Storm Grey  
Floor: 12"x24" Storm Grey







Wall: 12"x14.5" Arabesque Mosaic Beige Mix  
 Floor: 16"x32", 32"x32" Polar







Wall: 13.7"x14.5" Wave Mosaic Beige Mix  
Floor: 12"x24" Polar





Wall: 12"x14.5" Arabesque Mosaic Grey Mix  
Floor: 3"x12" Storm Grey





Floor: 3"x12" Storm Grey  
 Wall: 12"x14.5" Arabesque Mosaic Grey Mix







Wall: 13.7"x14.5" Wave Mosaic Grey Mix - 12"x24" Smoke  
Floor: 12"x24" Smoke





Wall: 12.5"x15" Leaf Mosaic Beige Mix - 12"x24" Polar  
 Floor: 12"x24" Buff





Colors	32"x32"	16"x32"	24"x48"	12"x24"	3"x12"	12"x12" mosaic (2"x2")	13.7"x14.5" Wave mosaic	12"x14.5" Arabesque mosaic	12.5"x15" Leaf mosaic	3"x12" bullnose
POLAR	1103020 Matte	1103032 Matte	1103219 Matte	1103045 Matte	1103057 Matte	1103061 Matte	Beige Mix 1103067 Matte	Beige Mix 1103071 Matte	Beige Mix 1103069 Matte	1103065 Matte
BUFF	1103019 Matte	1103031 Matte	1103218 Matte	1103044 Matte	1103056 Matte	1103060 Matte				1103064 Matte
SMOKE	1103018 Matte	1103030 Matte	1103217 Matte	1103043 Matte	1103055 Matte	1103059 Matte	Grey Mix 1103066 Matte	Grey Mix 1103070 Matte	Grey Mix 1103068 Matte	1103063 Matte
STORM GREY	1103017 Matte	1103029 Matte	1103216 Matte	1103042 Matte	1103054 Matte	1103058 Matte				1103062 Matte

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®STONE VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.4%	
		ASTM C373	0.5%	Meeting the water absorption criteria of the American national standard PTCA	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample must show visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	≥0.42 WET	≥0.42 WET	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recordedpost cleaning.	NOT AFFECTED	
	BREAKING STRENGTH	ASTM C648	≥250 lbf	8mm ≥300 lbf 10mm ≥400 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in ( ±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

## Packaging Specifications

SIZES		THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
3"x12" RECTIFIED	NOMINAL	8 mm	60	15 SF	51	48	720 SF	2,440
12"x24" RECTIFIED	NOMINAL	8 mm	8	16 SF	52.8	48	768 SF	2,534
16"x32" RECTIFIED	NOMINAL	10 mm	4	14.22 SF	62.58	24	341.33 SF	1,502
32"x32" RECTIFIED	NOMINAL	10 mm	2	14.22 SF	62.58	40	568.88 SF	2,503
24"x48" RECTIFIED	NOMINAL	10 mm	2	16 SF	76.8	32	512 SF	2,457
MOSAIC AND COORDINATING TRIMS								
12"x12" MOSAIC (2"x2" - 36 DOT)	NOMINAL	8 mm	10	10 PCS	33	45	450 PCS	1,485
12.5" X15" LEAF MOSAIC	NOMINAL	8 mm	10	10 PCS	33	20	200 PCS	660
13.7"X14.5" WAVE MOSAIC	NOMINAL	8 mm	10	10 PCS	33	20	200 PCS	660
12"X14.5" ARABESQUE MOSAIC	NOMINAL	8 mm	10	10 PCS	33	20	200 PCS	660
3"x12" BULLNOSE	NOMINAL	8 mm	15	15 PCS	14.55	168	2,520 PCS	2,444

\*WEIGHT PER PALLET DOES NOT INCLUDE pallet WEIGHT itself. All other sizes will be packaged as ordered. Please contact MILESTONE Customer Service at 1-877-356-7461 for packaging information. Minimum grout size recommended = 5 mm (or approx. 3/16") If staggered tile placement, we recommend using a 30% offset. If specified brick pattern with 1/2 pattern mandatory, a bigger grout is recommended to hide imperfections of installation (minimum 1/4").

## Cleaning & Maintenance

Porcelain tiles are low-maintenance, moisture-resistant, scratch-resistant, and stain-resistant. Completely inhospitable to germs and bacteria, porcelain tile is also among the easiest flooring material to clean and maintain.

## Routine Care Instructions:

1. Sweep or vacuum loose dust and debris from the floor.
2. Mop the floor with a mild cleaning solution (wax, oil-based, and abrasive cleaners are not recommended).
3. Rinse thoroughly with clean, clear water.
4. (Optional) Dry the floor using a clean cloth to increase shine and prevent water spots.

Note: For desired results, it is particularly important to combine the effect of the cleaning solution with a vigorous mechanical cleaning action.

### USAGE AND FEATURES

FLOOR

WALL

SHOWER

MONOCALIBER RECTIFIED

MOSAICS & TRIM PIECES



Green Memberships & Accreditations

DESCRIPTION	
	Defines post-consumer content of as much as 3% recycled glass which reduces landfill impact.
	Defines pre-consumer content of as much as 45% recycled material which reduces our carbon footprint.
	Florim USA sources >95% raw material within a 500 mile radius, which results in a smaller carbon footprint.
	Tile Council of North America and the American National Standards Institute's standard for sustainability and environmental impact.
	A declaration that Florim USA values the environment and works daily to minimize our adverse impact upon it.
	The Health Product Declaration Collaborative transparency declaration for all of Florim USA's naturally occurring materials.
	Certification of plant and product specific Environmental Product Declaration (EPD) which tracks environmental impacts from the production of porcelain tile.
	Underwriter's Laboratories certification of low emitting materials. Florim USA is Green Guard Gold certified.
	Bureau Veritas Standards Program verifies and certifies both pre- and post-consumer recycled content.
	Florim USA actively participates in the Tile Council of North America which allows us to be on the forefront of advances in the tile industry and its standards.
	USGBC is committed to suit a more sustainable life. Florim USA supports this mission by manufacturing products which aid architects in achieving USGBC certification.
	Florim USA's sustainability and social practices support the mission of The International Living Future Institute which strives to create a socially just, culturally rich, and ecologically restorative community.
	The Tennessee Recycling Coalition is dedicated to promoting recycling and sustainable material management practices, and awarded Florim USA the Tennessee Recycler of the Year award for 2020.

This product meets or exceeds all standards described in ANSI A137.1.  
Este product cumple o exceed todos los estandares de ANSI A137.1.

Progress that invests in the entire society

As an active member of the U.S Green Building Council, MILE®stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices. Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 45% recycled content.
- Post-consumer recycled content levels as much as 3%.
- Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- Local sourcing of >95% raw materials (within 500-mile radius of factory) resulting in low transportation related carbon emissions.

MILE®stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality by 2030.





made in the  
**USA** 



300 International Blvd. Clarksville, TN 37040 | [www.milestonetiles.com](http://www.milestonetiles.com) | 1-877-356-7461